


### POWER CABLE

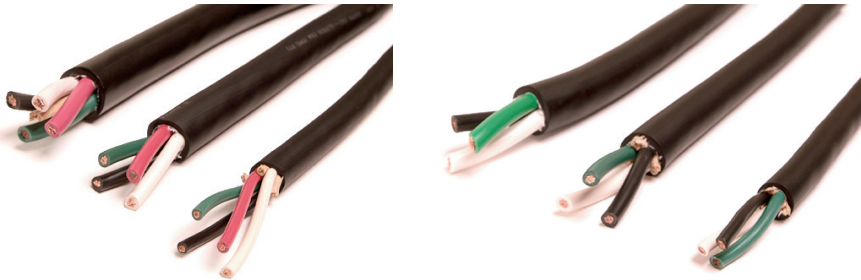

- Rugged, thick jacket
- Flexible
- Resists Abrasion, Cut, Tear, Flame (VW-1), Grease, Oil and Water, Cold temperatures
- UL Rated
- Made in the USA

### CONSTRUCTION:

Highly flexible annealed bare copper conductors, twisted and reinforced with paper fillers, and insulated with a TPE (thermoplastic elastomer) jacket. Operating temperatures range from -40°C to +90°C (-40°F to 194°F). Rated to 600 volts. Stocked on 250 reels. Coiled, boxed and shrink wrap packaging available for 25 or 50 ft. lengths, and small reels for 100 ft. lengths. Custom lengths also available upon request.

GAUGE	STRANDING	O.D	AMPACITY*	WEIGHT/1,000 ft.
2/3	262/0.0156	1.30	95.0	1287 lbs.
2/4	262/0.0156	1.45	80.0	1644 lbs.
4/3	165/0.0156	1.13	70.0	913 lbs.
4/4	1650/0.0156	1.25	60.0	1156 lbs.
6/3	184/0.0117	0.97	55.0	641 lbs.
6/4	184/0.0117	1.05	45.0	785 lbs.
8/3	67/0.0156	0.83	40.0	452 lbs.
8/4	67/0.0156	0.93	35.0	557 lbs.
10/3	104/30	0.65	30.0	281 lbs.
10/4	104/30	0.70	25.0	336 lbs.
12/3	65/30	0.59	25.0	217 lbs.
12/4	65/30	0.64	25.0	217 lbs.

\* Per conductor, at 30°C (86°F)

### APPLICATION:

Heavy duty service for welding machines, tools, portable lights and other machinery motor leads.

### DIRECT WELDING DIVISION

22 Industrial Way, P.O. Box 57 Denver, PA 17517 P 1 800 233 3848 F 1 800 752 2654

Warehouse Locations – Las Vegas, Portland, Houston

Specifications contained herein reflect current data and are subject to change. Values are nominal and or approximate.

Made in USA  
www.directwireusa.com