


WELDING CABLE GUIDE



SUGGESTED AMPACITY FOR WELDING CABLE

GAUGE	50'	75'	100'	125'	150'	175'	200'	225'	250'	300'	350'	
#4 .178 lbs. per ft.	100 9 lbs.	100 13.5 lbs.										Available in these colors
#3 .221 lbs. per ft.	150 16.5 lbs.											
#2 .263 lbs. per ft.	200 14 lbs.	150 20 lbs.	100 27 lbs.	100 33 lbs.								
#1 .344 lbs. per ft.	250 18 lbs.	200 25.8 lbs.	150 35 lbs.		100 52 lbs.							
1/0 .424 lbs. per ft.	350 22 lbs.	250 32 lbs.	200 43 lbs.	150 52 lbs.		100 74.2 lbs.	100 85 lbs.					
2/0 .512 lbs. per ft.	400 26 lbs.	300 38.4 lbs.	250 52 lbs.	200 64 lbs.	150 76.8 lbs.		100 102.4 lbs.	100 115.2 lbs.				
3/0 .624 lbs. per ft.	500 32 lbs.	350 47.5 lbs.	300 64 lbs.	250 80 lbs.	200 76.8 lbs.	150 95 lbs.	150 126.8 lbs.			100 190 lbs.		
4/0 .800 lbs. per ft.	550 40 lbs.	450 60 lbs.	350 80 lbs.	300 100 lbs.	250 120 lbs.	200 140 lbs.	200 160 lbs.	150 180 lbs.	150 180 lbs.		100 280 lbs.	

CABLE SIZES - DRAWN TO SCALE

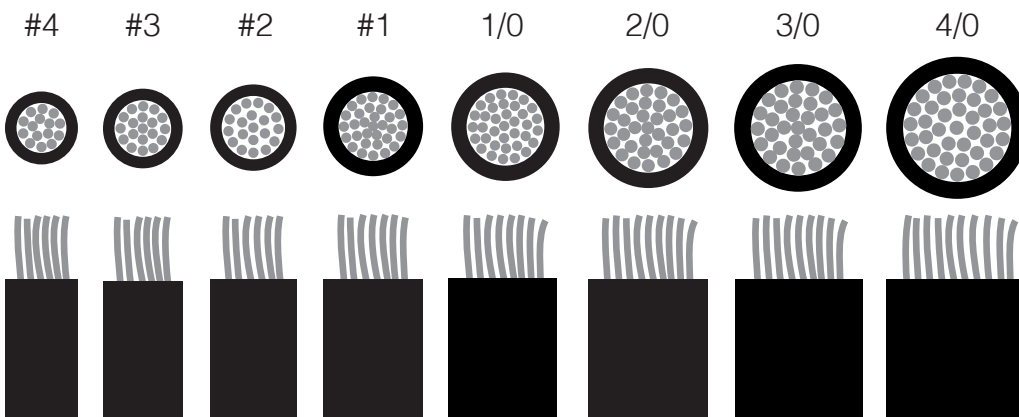

Make sure you're ordering the right cable for the right job.

Contact the experts. We'll get you what you need when you need it.

1-800-233-3848
www.directwireusa.com

Made in the USA